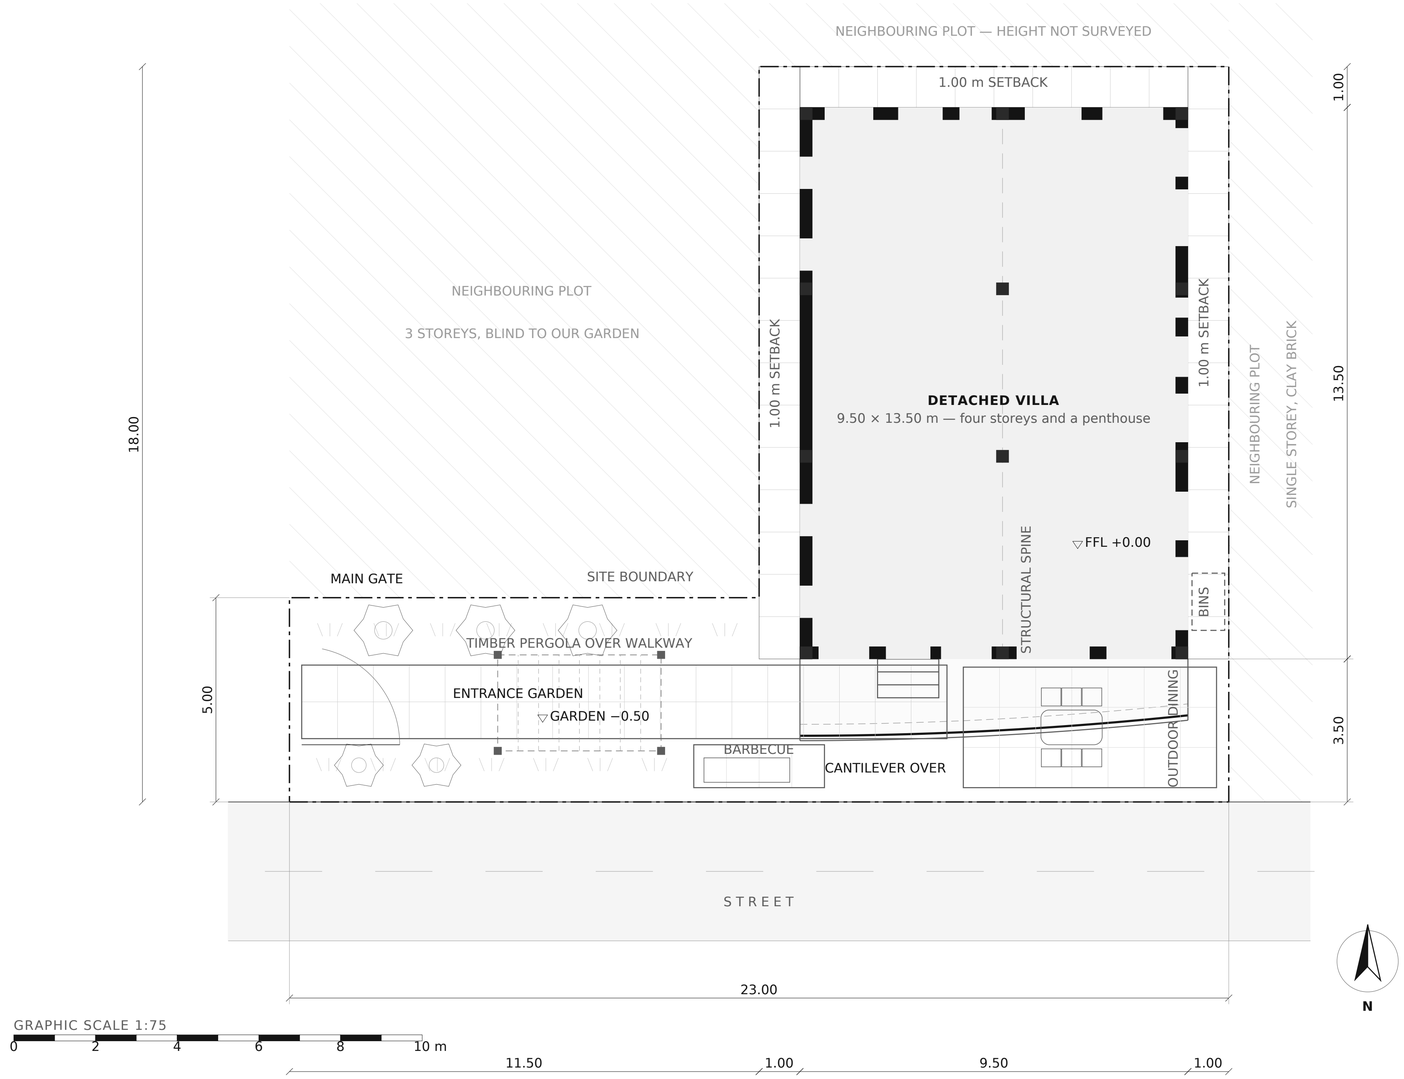



# SITE PLAN — DETACHED VILLA

LEVEL +0.00 · 1:75 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| PLOT, SOUTH BAND 23.00 × 5.00 | 115.0 m² |
| PLOT, EAST PART 11.50 × 13.00 | 149.5 m² |
| **TOTAL** | **264.5 m²** |
| VILLA FOOTPRINT 9.50 × 13.50 M | 128.2 m² |
| SITE COVERAGE | 48.5 % |
| ENTRANCE GARDEN, WEST | 57.5 m² |
| FORECOURT, IN FRONT | 40.3 m² |
| SETBACKS, THREE SIDES | 38.5 m² |
| GROSS INTERNAL AREA, FIVE STOREYS | 505.2 m² |

## GENERAL NOTES

1. Final draft — layout agreed. The villa is detached: set back 1.00 m from the west, north and east boundaries, the three sides a neighbour stands on. The south is not set back — it faces the street across our own forecourt.

2. Footprint 9.50 × 13.50 m = 128.2 m² on a 264.5 m² plot, 48.5 % coverage against 63.0 % for the attached scheme at P4. Detaching costs 22 % of each floor and buys an open aspect on all four sides and no party wall.

3. The setbacks are our own land, so each is a 1.00 m paved side passage rather than a dead strip, reached from the forecourt on the east and from the entrance garden on the west.

4. The cantilever oversails the forecourt by 2.00 m at the west end and 1.50 m at the east, leaving at least 1.50 m clear to the street, and covers the front door and its three risers. Nothing projects over a boundary, but the overhang is subject to the local projection rule; confirm before construction.

5. The client's survey sketch recorded a 0.50 m step in the north boundary and a 5.50 m offset between the two blocks' north walls; the two cannot both be true. Resolved in favour of a straight boundary at 18.00. To be confirmed by measured survey before any work starts on site.

6. Structure is an RC frame on the grid shown, 300 mm columns on wall centrelines so none stands in a room. The A-300 enlargements are the last sheets still on the old 11.50 × 14.50 footprint.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING


**SITE PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-000** | **P16** | **1:75 @ A1** | **2026-10-07** |

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
P15 2026-10-07 exterior: two schemes, elevations and balcony curves
P16 2026-10-07 neighbours as surveyed: west 3 storeys and blind, east single storey

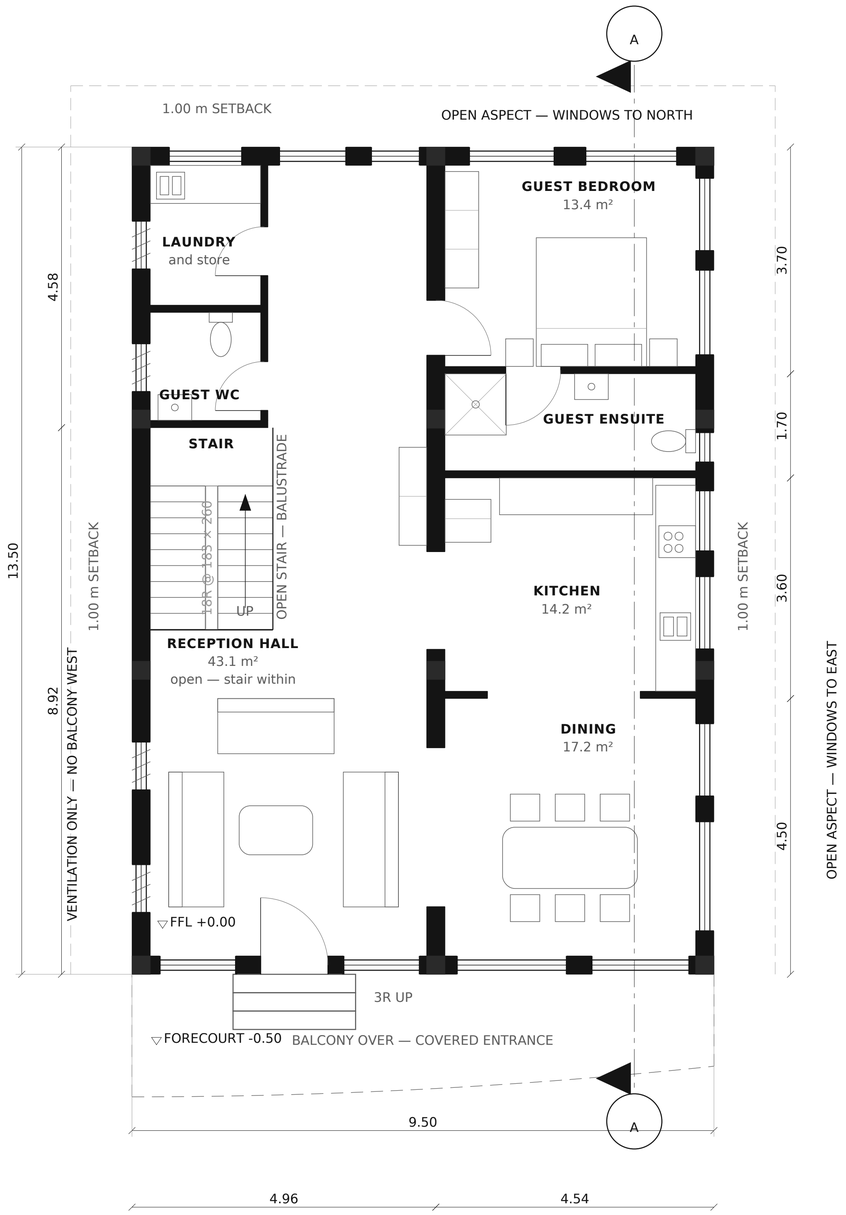


GRAPHIC SCALE 1:50

0 2 4 6 8 10 m

N

# GROUND FLOOR PLAN — DETACHED VILLA

LEVEL +0.00 · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| RECEPTION HALL | 43.1 m² |
| STAIR | 6.6 m² |
| GUEST WC | 3.2 m² |
| LAUNDRY | 4.1 m² |
| DINING | 17.2 m² |
| KITCHEN | 14.2 m² |
| GUEST ENSUITE | 6.5 m² |
| GUEST BEDROOM | 13.4 m² |
| **TOTAL** | **108.3 m²** |
| GROSS INTERNAL AREA, THIS FLOOR | 114.8 m² |
| BEDROOMS | 1 — the guest suite; 8 above |
| FLOOR ABOVE | +3.30 |

## GENERAL NOTES

1. Final draft — layout agreed. The floor you receive people on: the family living is upstairs where the balconies are, so this one takes arrival, eating and a guest suite for anyone who cannot manage the stair.

2. Hall, dining and kitchen are one open sequence. The spine is cased open to both at 2.60 and 1.60 m, and the kitchen serves the dining through a 2.50 m opening rather than a door. Only the guest suite and the two service rooms are closed.

3. The reception hall is the whole west strip at 43.1 m², with the stair standing in it. It turns the corner behind the stair and runs on to the north wall, so the guest bedroom opens off the hall and there is no circulation room anywhere on the floor.

4. Guest WC, laundry and store are one block against the west wall, the only part of this floor that is walled off. East and north carry ordinary windows, the west louvred ventilation only.

5. The front door is in the hall's south wall, under the cantilever, which projects about 1.75 m there — so the entrance is covered without a porch being added to the elevation. Three risers up from the forecourt at −0.50.

6. Bedrooms are numbered 1 to 11 through the house, south to north and west before east on each floor; the ground floor's room is the guest bedroom and carries no number.

7. The A-300 enlargements are the last sheets still on the old 11.50 × 14.50 footprint.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**GROUND FLOOR PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-100** | **P14** | **1:50 @ A1** | **2026-10-07** |


Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P11 2026-10-07 penthouse: 2.51 m corridor outside the flat; living room to the face
P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan

# FIRST FLOOR PLAN — DETACHED VILLA

LEVEL +3.30 · 1:50 @ A1 · METRES

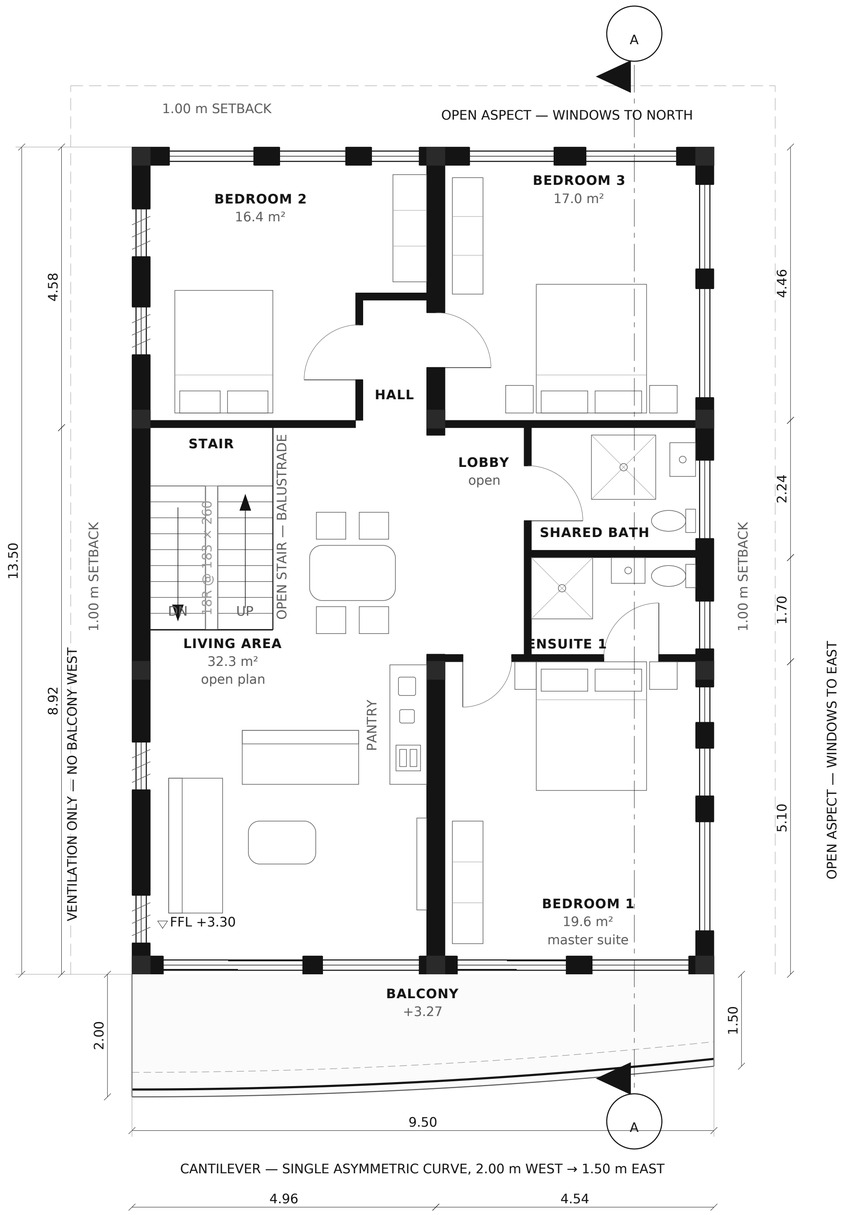








## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| LIVING AREA | 32.3 m² |
| STAIR | 6.6 m² |
| BEDROOM 1 — MASTER | 19.6 m² |
| BEDROOM 1 ENSUITE | 4.2 m² |
| LOBBY | 4.8 m² |
| SHARED BATH | 5.4 m² |
| BEDROOM 2 | 16.4 m² |
| HALL | 2.0 m² |
| BEDROOM 3 | 17.0 m² |
| **TOTAL** | **108.3 m²** |
| GROSS INTERNAL AREA, THIS FLOOR | 114.8 m² |
| BALCONY, EXTERNAL | 17.4 m² |
| BEDROOMS | 3 — the master, bedrooms 2 and 3 |
| FLOOR ABOVE / BELOW | +6.60 / +0.00 |

## GENERAL NOTES

1. Final draft — layout agreed. The living floor: a living area and bedrooms 1 to 3. The living area is 32.3 m² with the stair standing in it and the pantry open along the spine, opening through a sliding door onto the cantilever.

2. Bedrooms are numbered 1 to 11 through the house, south to north and west before east on each floor; the ground floor's room is the guest bedroom and carries no number.

3. Bedroom 1 is the master at 19.6 m²: its north wall sits 1.30 m further north than the suite below it, and the shared bath gives up the same depth at 5.4 m².

4. The pantry is a counter against the solid stretch of spine, not the walled room the third floor has. The lobby has no wall either: the spine is opened 3.69 m between the columns, a downstand beam rather than a wall.

5. The west strip is otherwise the third floor's and the east strip the second's, so the wet rooms stack and the stair lines through. East and north carry ordinary windows, the west louvred ventilation only. The hall to the north bedrooms stops at its last door; the dead end beyond goes to bedroom 2, 16.4 m².

6. The cantilever runs on all three upper floors and the penthouse — the same curve, 2.00 m west sweeping to 1.50 m east, 17.4 m² — with sliding doors from the living area and bedroom 1.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**FIRST FLOOR PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-101** | **P14** | **1:50 @ A1** | **2026-10-07** |


Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P11 2026-10-07 penthouse: 2.51 m corridor outside the flat; living room to the face
P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan

# SECOND FLOOR PLAN — DETACHED VILLA

LEVEL +6.60 · 1:50 @ A1 · METRES

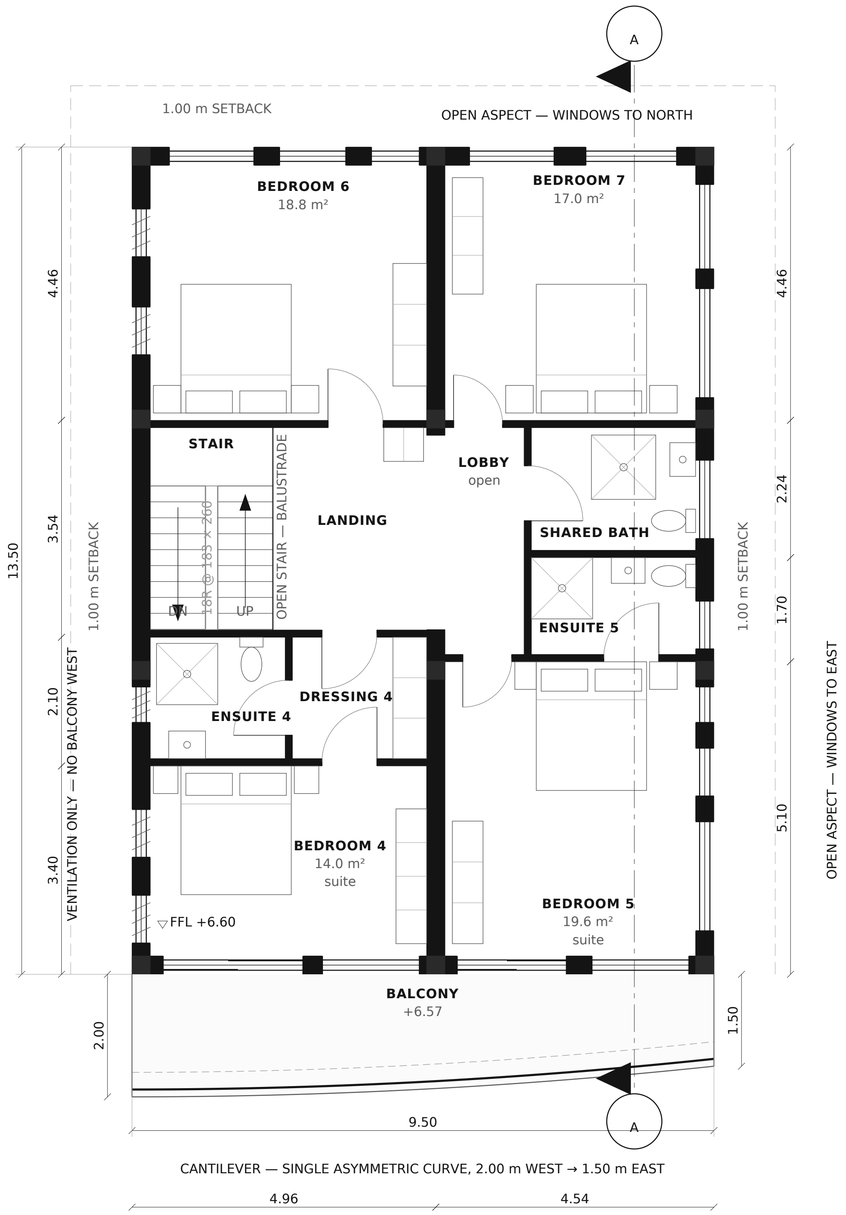


GRAPHIC SCALE 1:50

0 2 4 6 8 10 m

N

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| BEDROOM 4 — SUITE | 14.0 m² |
| BEDROOM 4 ENSUITE | 4.4 m² |
| BEDROOM 4 DRESSING | 4.3 m² |
| BEDROOM 5 — SUITE | 19.6 m² |
| BEDROOM 5 ENSUITE | 4.2 m² |
| LOBBY | 4.8 m² |
| STAIR | 6.6 m² |
| LANDING | 7.9 m² |
| SHARED BATH | 5.4 m² |
| BEDROOM 6 | 18.8 m² |
| BEDROOM 7 | 17.0 m² |
| **TOTAL** | **107.0 m²** |
| GROSS INTERNAL AREA, THIS FLOOR | 114.8 m² |
| BALCONY, EXTERNAL | 17.4 m² |
| BEDROOMS | 4 — two of them suites |
| FLOOR ABOVE / BELOW | +9.90 / +3.30 |

## GENERAL NOTES

1. Final draft — layout agreed. A bedroom floor: bedrooms 4 to 7, two of them suites, on the detached envelope.

2. Bedrooms are numbered 1 to 11 through the house, south to north and west before east on each floor; the ground floor's room is the guest bedroom and carries no number.

3. Bedroom 4 takes the south-west with its ensuite and dressing behind; bedroom 5 the south-east, its ensuite off the bedroom.

4. The east strip is the first floor's, line for line — shared bath 5.4 m², lobby 4.8 m², bedroom 5 at 19.6 m² as its wall moves 1.30 m north. Every wet room and east window stacks, one drainage stack each, straight to the ground.

5. The lobby has no door: the spine is opened its whole length between the columns, so lobby and landing read as one space. It serves bedroom 5, the shared bath and bedroom 7. Bedroom 6 has the old hall — the whole north-west quarter, 18.8 m².

6. The cantilever is carried here too — the same curve, 2.00 m west to 1.50 m east, 17.4 m² — so it runs all three upper floors and the slabs stack. Both suites open onto it; a screen between the two is worth considering.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING


**SECOND FLOOR PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-102** | **P14** | **1:50 @ A1** | **2026-10-07** |

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P11 2026-10-07 penthouse: 2.51 m corridor outside the flat; living room to the face
P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan

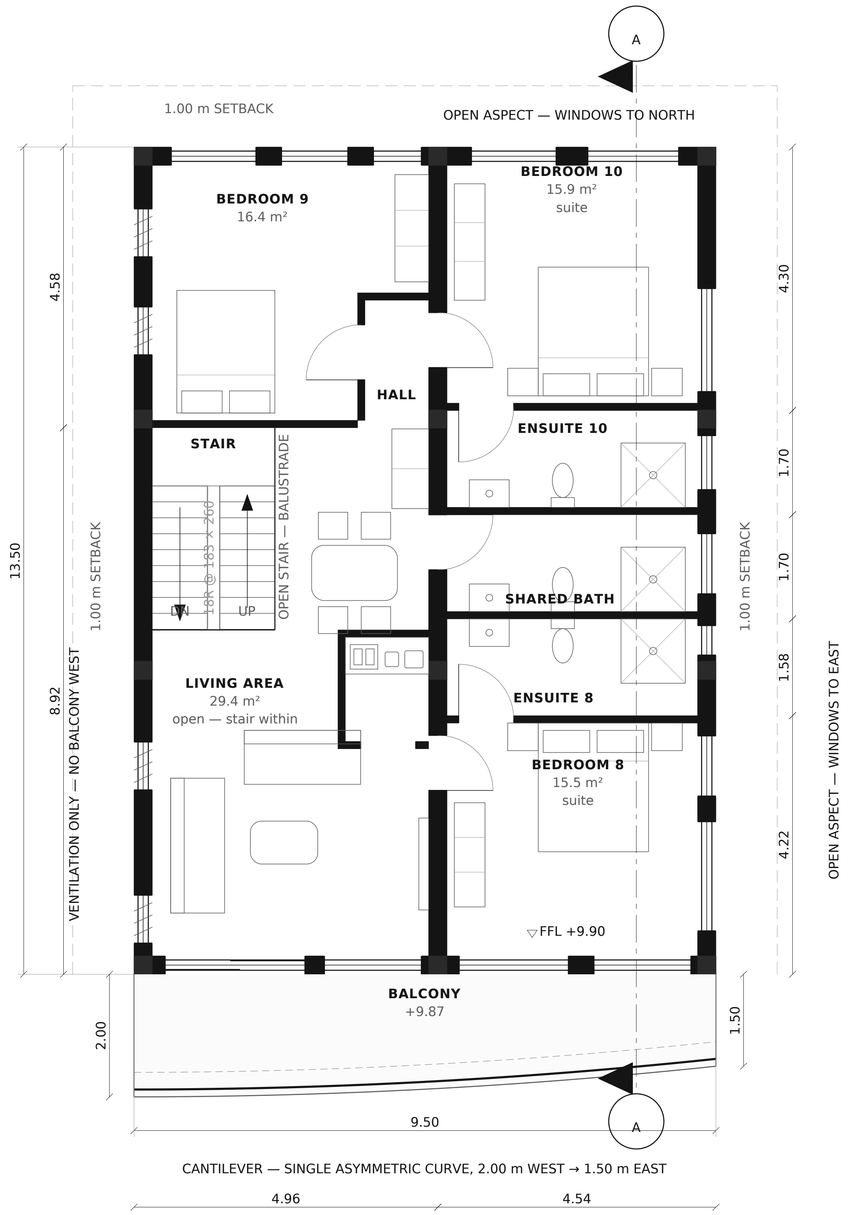


GRAPHIC SCALE 1:50

0 2 4 6 8 10 m

N

# THIRD FLOOR PLAN — DETACHED VILLA

LEVEL +9.90 · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| LIVING AREA | 29.4 m² |
| STAIR | 6.6 m² |
| HALL | 2.0 m² |
| BEDROOM 8 — SUITE | 15.5 m² |
| BEDROOM 8 ENSUITE | 6.5 m² |
| SHARED BATH | 6.5 m² |
| BEDROOM 10 ENSUITE | 6.5 m² |
| BEDROOM 10 — SUITE | 15.9 m² |
| BEDROOM 9 | 16.4 m² |
| **TOTAL** | **105.3 m²** |
| GROSS INTERNAL AREA, THIS FLOOR | 114.8 m² |
| BALCONY, EXTERNAL | 17.4 m² |
| ROOF OVER, TOP OF SLAB | +13.20 |

## GENERAL NOTES

1. Final draft — layout agreed. The building is set back 1.00 m from the west, north and east boundaries; the south faces the street across our own forecourt. Detaching costs 22% of the floor — 114.8 m² against 147.3 — and removes the party wall, so one structural spine divides the plate.

2. Bedrooms are numbered 1 to 11 through the house, south to north and west before east on each floor; the ground floor's room is the guest bedroom and carries no number.

3. The west strip south of bedroom 9 is one room: no wall divides the living area from the stair standing in it. The stair is a private villa stair — 900 mm flights, 18R at 183 × 260 — needing no enclosure, no smoke vent and no lift.

4. The south cantilever is reinforced concrete: one asymmetric curve bowed outward, 2.00 m at the west end sweeping away to 1.50 m at the east. Every point on the edge stands outside the line joining the two ends.

5. East and north carry ordinary windows. The east neighbour is a single storey in clay brick 1.00 m away, so they clear its roof by 1.20 m at the first floor. The west is louvred only — that neighbour is 3 storeys, and blind toward us.

6. Bedroom 8 and the shared bath open off the living area; bedrooms 9 and 10 off the hall, whose dead end goes to bedroom 9. Bedroom 10 has no balcony: it takes the north wall and two windows.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING


**THIRD FLOOR PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-103** | **P16** | **1:50 @ A1** | **2026-10-07** |

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
P15 2026-10-07 exterior: two schemes, elevations and balcony curves
P16 2026-10-07 neighbours as surveyed: west 3 storeys and blind, east single storey

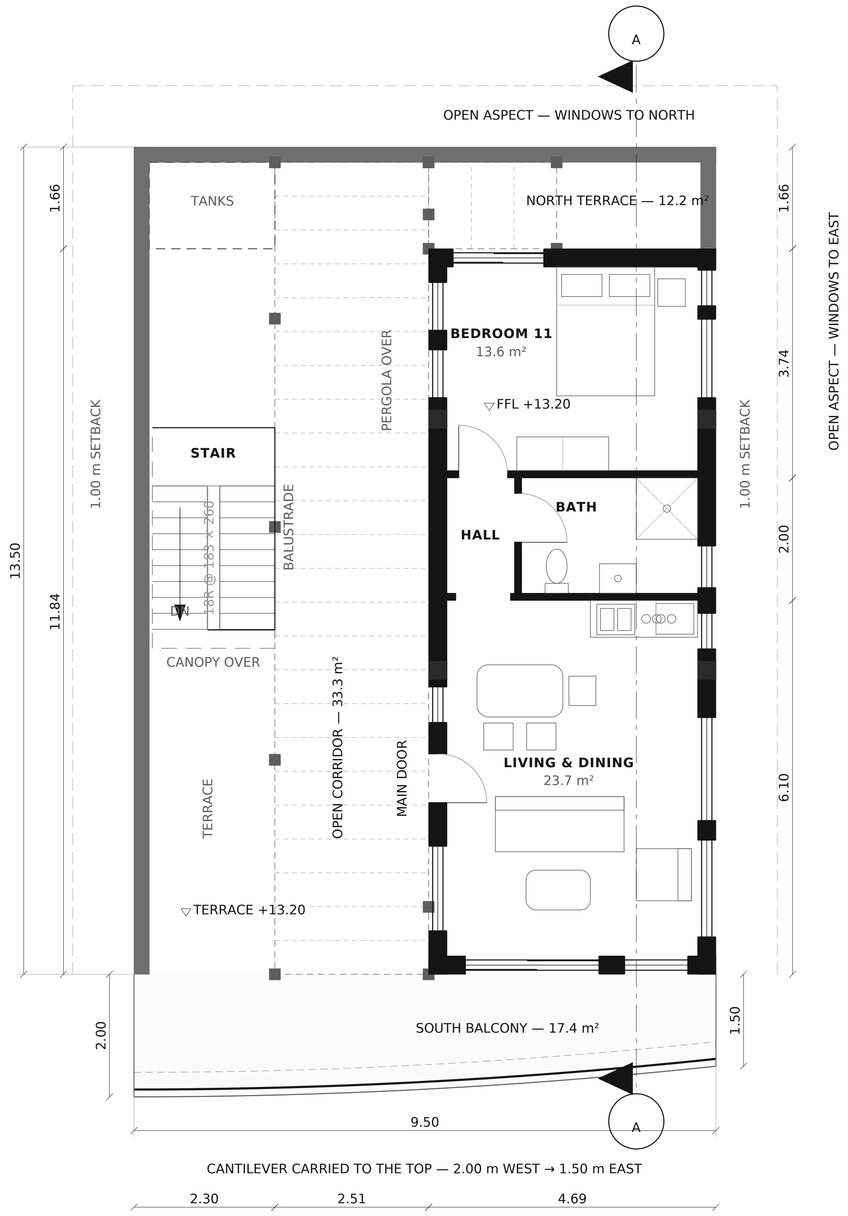


GRAPHIC SCALE 1:50

0 2 4 6 8 10 m

N

# PENTHOUSE PLAN — DETACHED VILLA

LEVEL +13.20 · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## AREA SCHEDULE

| | |
|---|---|
| LIVING AND DINING | 23.7 m² |
| HALL | 2.1 m² |
| BATH | 5.4 m² |
| BEDROOM 11 | 13.6 m² |
| **TOTAL** | **44.8 m²** |
| GROSS INTERNAL AREA, FLAT | 46.0 m² |
| SOUTH BALCONY, ON THE CANTILEVER | 17.4 m² |
| SOUTH TERRACE, WEST OF THE CORRIDOR | 11.5 m² |
| NORTH TERRACE | 12.2 m² |
| OPEN CORRIDOR | 33.3 m² |
| TOP OF PENTHOUSE SLAB | +16.45 |
| FLOOR BELOW | +9.90 |

## GENERAL NOTES

1. Bedrooms are numbered 1 to 11 through the house, south to north and west before east on each floor; the ground floor's room is the guest bedroom and carries no number. This is bedroom 11.

2. Final draft — layout agreed. The two open areas are joined outside the flat, down the west, by a corridor 2.51 m clear against the 2.00 m asked for, pergola over its whole length. The front door is off it.

3. 46.0 m² indoors; 17.4 m² of balcony on the cantilever, 11.5 m² of terrace by the stair, 12.2 m² north and 33.3 m² of corridor — all four run into one another.

4. The corridor passes east of the stair: the well is 2.00 m wide and hard against the west parapet, its half landing 1.65 m below this floor, so it stays open. Its east side is the flat's west wall, on the spine at x 17.46 — the one line on this side of the roof with a beam under it.

5. That leaves the flat 4.09 m clear, which will not take two bedrooms side by side: stacking them needs 12.06 m of the 13.50 m depth and leaves 1.44 m for both terraces. The second bedroom is what pays for the corridor.

6. The living room runs south to the building's face, so it opens straight onto the cantilever; y 3.65 is a grid line, so that wall sits on the columns and over the wall below. At +16.45 the penthouse is a fourth storey for most planning codes.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING


**PENTHOUSE PLAN — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-104** | **P14** | **1:50 @ A1** | **2026-10-07** |

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P11 2026-10-07 penthouse: 2.51 m corridor outside the flat; living room to the face
P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan

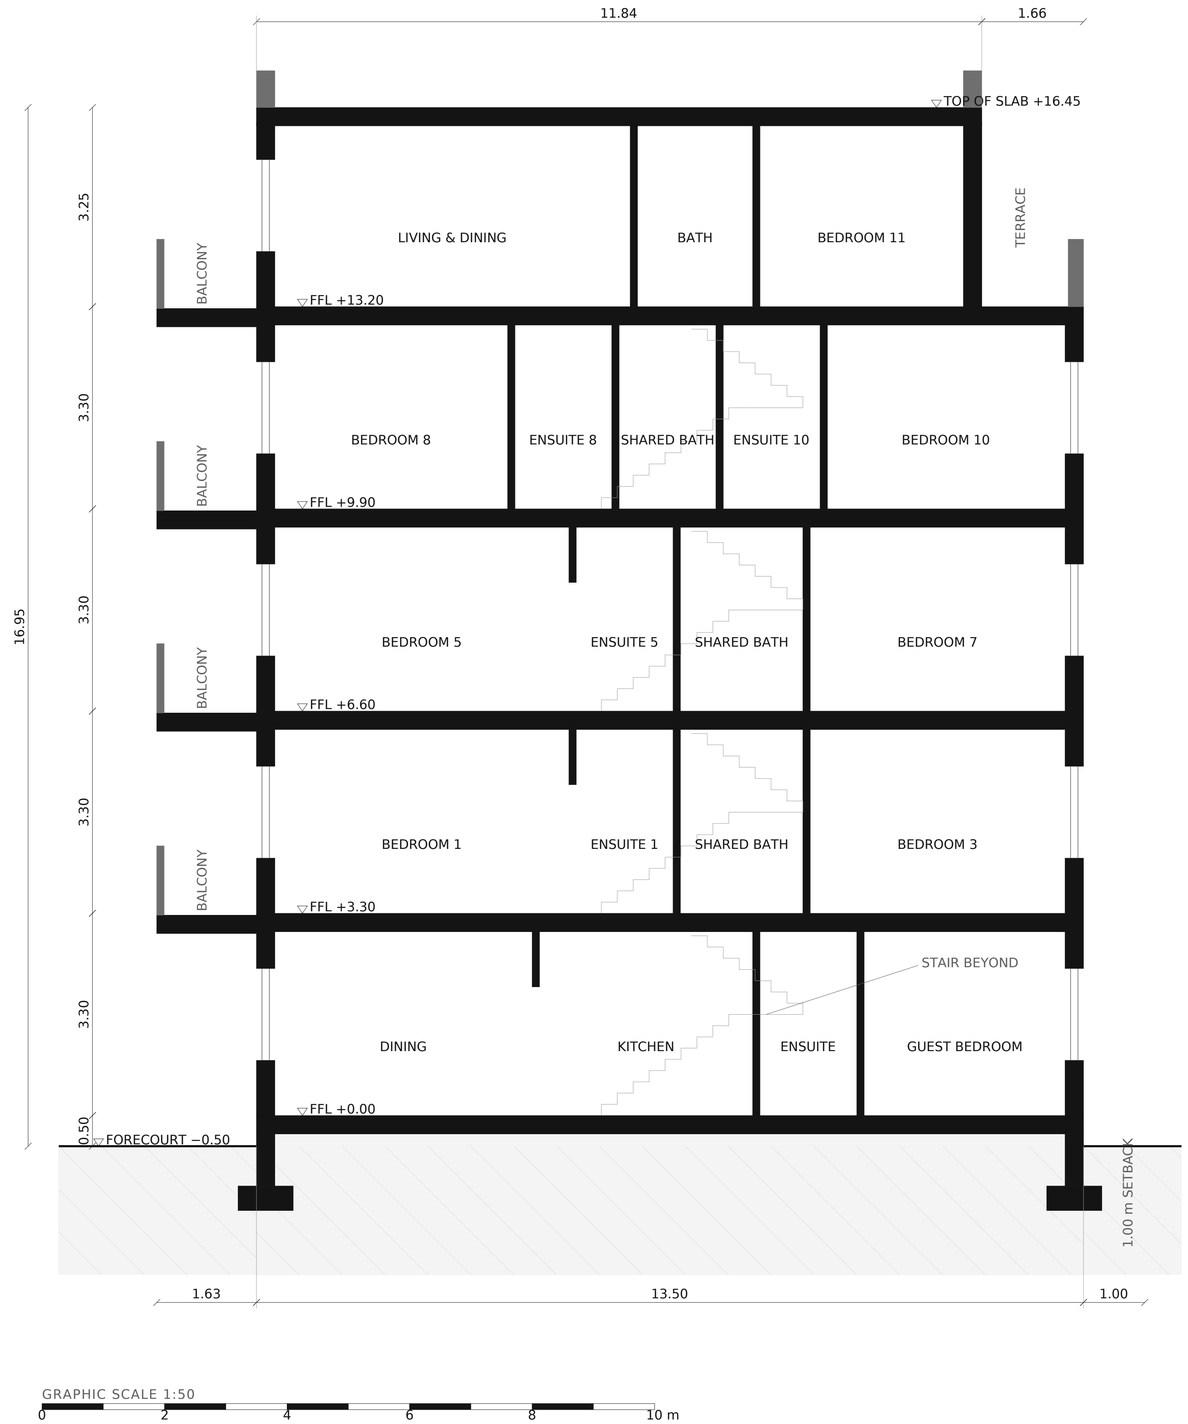


# SECTION A–A — DETACHED VILLA

LEVEL looking west · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 — Finished floor level datum

## LEVEL DATUMS

| | |
|---|---|
| FORECOURT AND GARDEN | -0.50 |
| GROUND FLOOR | +0.00 |
| FIRST FLOOR | +3.30 |
| SECOND FLOOR | +6.60 |
| THIRD FLOOR | +9.90 |
| PENTHOUSE FLOOR | +13.20 |
| PENTHOUSE, TOP OF SLAB | +16.45 |
| CLEAR CEILING HEIGHT | 3.00 m |
| STRUCTURAL ZONE | 0.30 m |
| OVERALL, GARDEN TO TOP | 16.95 m |

## GENERAL NOTES

1. Final draft — layout agreed. Looking west, cut on the line marked A–A on every plan, at x 20.70. That line is not arbitrary: it is the one north-south cut that passes through a room at every level and through every wet room in the east strip, and it clears all three column lines, so the slabs are seen spanning rather than a column standing in the cut.

2. The wet rooms on the first and second floors sit one over the other, wall for wall — 8.60, 10.30 and 12.42 on both — so each drops a single drainage stack straight to the ground. The third floor divides the strip on its own lines and is shown as it is.

3. Flat slab on the column grid, 300 mm structural zone, giving 3.00 m clear at every level and 3.30 m floor to floor; the penthouse is 3.25 m floor to top of slab.

4. The south cantilever is carried on all three upper floors and the penthouse. It projects 1.63 m at this cut, against 2.00 m at the west end of the curve and 1.50 m at the east, with a glass balustrade at the slab edge.

5. The penthouse stands clear of the north edge, leaving the roof terrace beyond its north wall. The corridor that joins the two terraces runs west of this cut and does not appear; see A-104.

6. The stair is drawn in thin line beyond the cut, where it is seen through the open spine. Foundations are indicative only and subject to a ground investigation and the engineer's design.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**SECTION A–A — DETACHED VILLA**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-200** | **P14** | **1:50 @ A1** | **2026-10-07** |

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.


REVISIONS

P11 2026-10-07 penthouse: 2.51 m corridor outside the flat; living room to the face
P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan




THE BALCONY CURVE IN PLAN — IT CANNOT SHOW IN ELEVATION

1.95 m DEEPEST · 0.75 m SHALLOWEST · 12.8 m² A FLOOR



GRAPHIC SCALE 1:100

0 2 4 m

# SOUTH ELEVATION — SCHEME A “WAVE”

LEVEL street frontage · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

## SCHEME A — WAVE

| | |
|---|---|
| WALLS | warm limestone render |
| SLAB NOSING | rounded, 180 mm |
| COVE LIGHT | in the underside of the nosing |
| BALUSTRADE | clear glass, 120 mm inboard |
| FRAMES | bronze anodised |
| BALCONY CURVE | serpentine |
| PROJECTION | 1.95 / 0.75 m |
| BALCONY AREA | 12.8 m² a floor |
| TOP OF BUILDING | +17.05 |

## GENERAL NOTES

1. Preliminary — the exterior only. The plans, site plan and section are agreed at P14 and nothing here changes them: same five levels, same 9.50 × 13.50 m footprint, same 1.00 m setbacks, same openings. Only the skin differs between the two schemes.

2. Every opening drawn here is read from the plan it belongs to rather than redrawn, and checks.py fails the build if an elevation ever shows one the plan does not have.

3. Scheme A takes its material from the contemporary reference: warm limestone render, a rounded slab nosing with a cove light tucked into its underside, clear glass balustrades and planting along the balcony edge. The four south bays read as glazed ribbons between the slabs.

4. The balcony curve is a serpentine — one full period across the frontage, 1.95 m deep at each end drawn in to 0.75 m at the waist. At the waist it is a planting ledge rather than somewhere to stand; the deep ends carry the furniture.

5. That shape costs area: 12.8 m² a floor against the 17.4 m² of the curve drawn today, so 18 m² over the four balcony levels. Adopting it re-issues A-000 and A-101 to A-104, which carry the balcony in plan.

6. The balconies do not wrap the corner as the reference does: the 1.00 m setbacks forbid anything projecting west, north or east, so the cantilever stays on the street frontage.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**SOUTH ELEVATION — SCHEME A “WAVE”**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-400** | **P15** | **1:50 @ A1** | **2026-10-07** |

Preliminary design issue — not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
P15 2026-10-07 exterior: two schemes, elevations and balcony curves




# SIDE & REAR ELEVATIONS — SCHEME A “WAVE”

LEVEL east, north and west · 1:75 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

## SCHEME A — WAVE

| | |
|---|---|
| WALLS | warm limestone render |
| SLAB NOSING | rounded, 180 mm |
| COVE LIGHT | in the underside of the nosing |
| BALUSTRADE | clear glass, 120 mm inboard |
| FRAMES | bronze anodised |
| BALCONY CURVE | serpentine |
| PROJECTION | 1.95 / 0.75 m |
| BALCONY AREA | 12.8 m² a floor |
| TOP OF BUILDING | +17.05 |

## GENERAL NOTES

1. Preliminary — the exterior only. The plans, site plan and section are agreed at P14 and nothing here changes them: same five levels, same 9.50 × 13.50 m footprint, same 1.00 m setbacks, same openings. Only the skin differs between the two schemes.

2. Every opening drawn here is read from the plan it belongs to rather than redrawn, and checks.py fails the build if an elevation ever shows one the plan does not have.

3. The east and north boundaries are open and carry ordinary windows on every floor. The west is the blind elevation: louvred ventilation only, drawn at high level, and nothing projects.

4. The penthouse stands back 4.81 m from the west and 1.66 m from the north, so on those two faces it is drawn in thin line behind the roof terrace parapet.

5. The balcony appears on the street frontage only and so does not show on any of these three faces.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING


**SIDE & REAR ELEVATIONS — SCHEME A “WAVE”**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-401** | **P15** | **1:75 @ A1** | **2026-10-07** |

Preliminary design issue — not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
P15 2026-10-07 exterior: two schemes, elevations and balcony curves

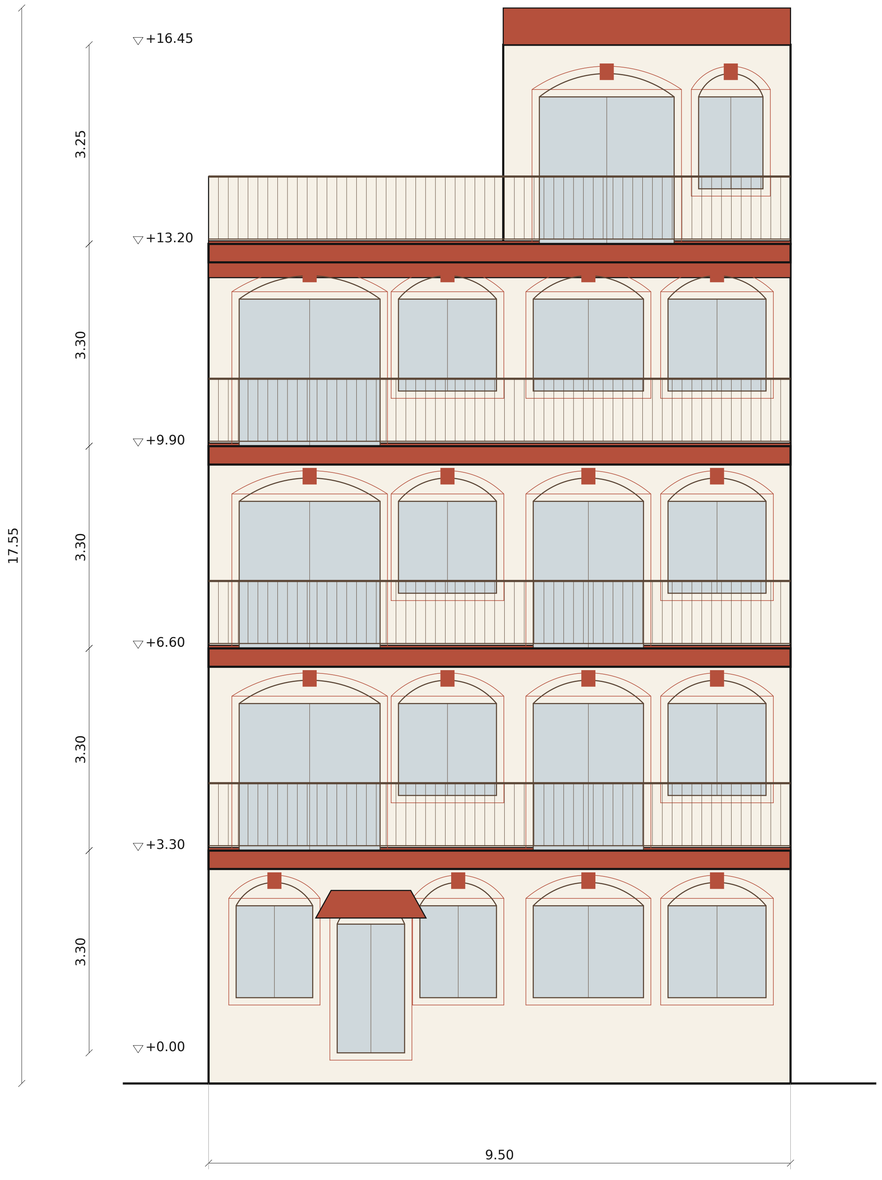


THE BALCONY CURVE IN PLAN — IT CANNOT SHOW IN ELEVATION

1.95 m DEEPEST · 0.90 m SHALLOWEST · 11.2 m² A FLOOR



GRAPHIC SCALE 1:100

0 2 4 m

# SOUTH ELEVATION — SCHEME B “ARCADE”

LEVEL street frontage · 1:50 @ A1 · METRES

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

## SCHEME B — ARCADE

| | |
|---|---|
| WALLS | ivory render, terracotta trim |
| FLOOR BANDS | 350 mm at every level |
| OPENINGS | round arched, keystone |
| BALUSTRADE | wrought iron |
| FRAMES | dark stained timber |
| BALCONY CURVE | bowed centre bay |
| PROJECTION | 1.95 / 0.90 m |
| BALCONY AREA | 11.2 m² a floor |
| TOP OF BUILDING | +17.05 |

## GENERAL NOTES

1. Preliminary — the exterior only. The plans, site plan and section are agreed at P14 and nothing here changes them: same five levels, same 9.50 × 13.50 m footprint, same 1.00 m setbacks, same openings. Only the skin differs between the two schemes.

2. Every opening drawn here is read from the plan it belongs to rather than redrawn, and checks.py fails the build if an elevation ever shows one the plan does not have.

3. Scheme B takes its ornament, not its shape, from the classical reference: ivory render with terracotta bands at every floor line, moulded surrounds, round-arched heads with keystones, and wrought-iron balustrade panels on the same cantilever.

4. The entrance is a recessed arched porch with a tiled hood, not a projecting portico. The cantilever already gives 1.96 m of cover over the front door and the forecourt has no room for one.

5. The balcony curve is a bowed centre bay — flanks at 0.90 m with a 5.00 m bow swelling to 1.95 m, blended so the bow meets the flanks tangentially. Centred on the frontage rather than the door, because symmetry is the whole character of the scheme.

6. It costs more area than scheme A: 11.2 m² a floor, 25 m² over the four levels. Adopting it re-issues A-000 and A-101 to A-104.

7. No pitched roof and no dome. Both raise the building, and at +16.45 the penthouse is already a fourth storey for most planning codes.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**SOUTH ELEVATION — SCHEME B “ARCADE”**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-410** | **P15** | **1:50 @ A1** | **2026-10-07** |


Preliminary design issue — not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
P13 2026-10-07 site plan redrawn for the detached villa
P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
P15 2026-10-07 exterior: two schemes, elevations and balcony curves

# SIDE & REAR ELEVATIONS — SCHEME B “ARCADE”

LEVEL east, north and west · 1:75 @ A1 · METRES

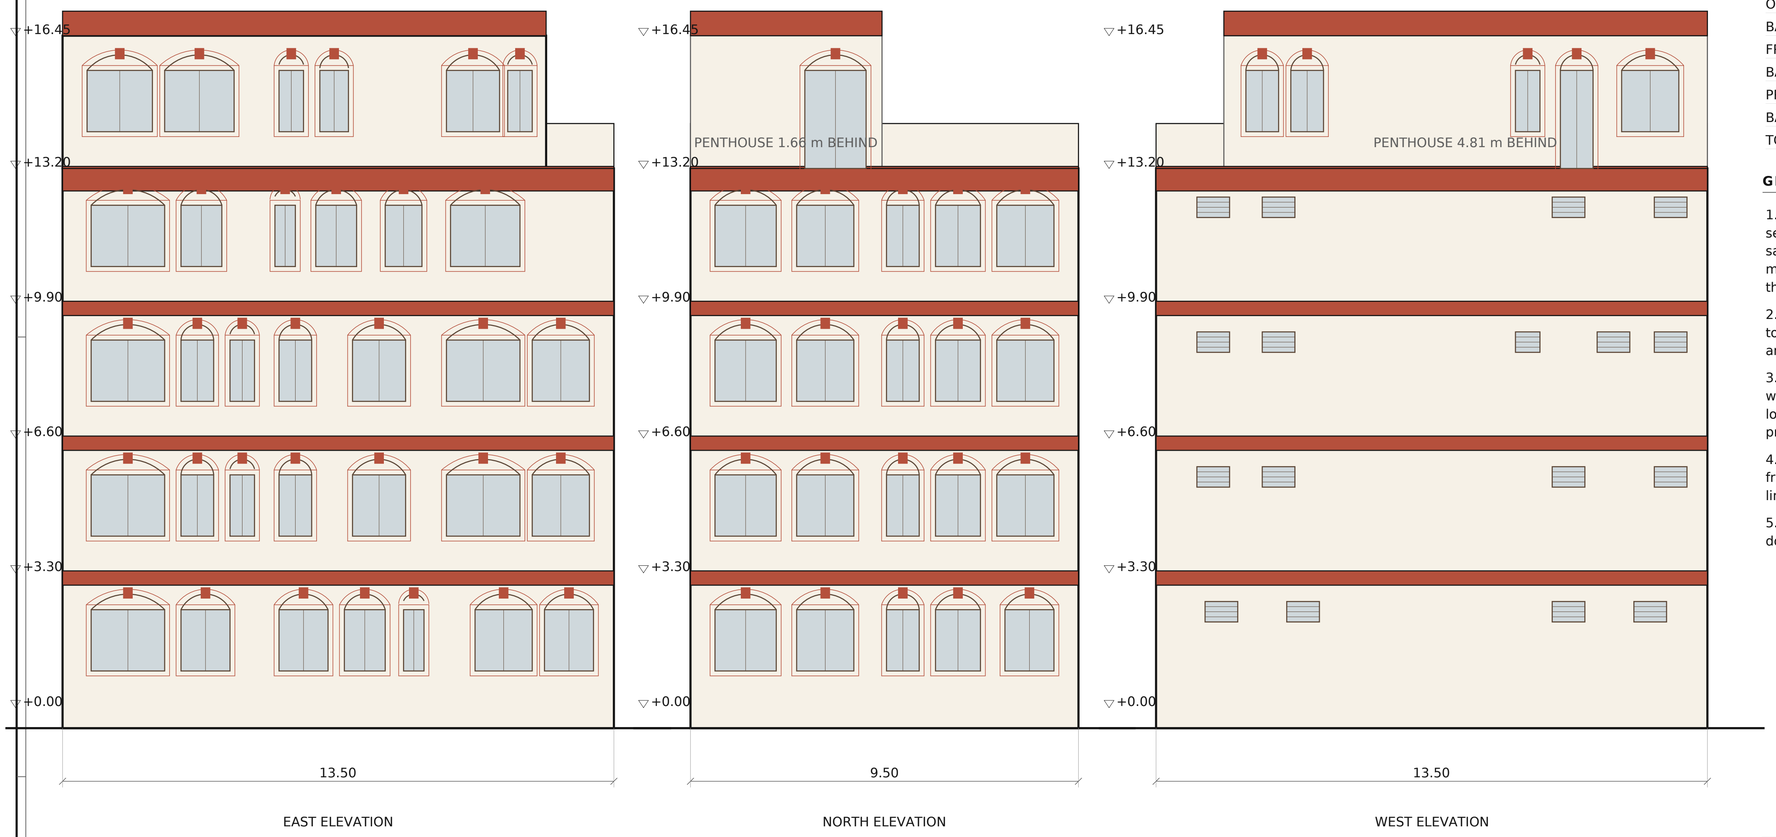


EAST ELEVATION

NORTH ELEVATION

WEST ELEVATION

## KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

## SCHEME B — ARCADE

| | |
|---|---|
| WALLS | ivory render, terracotta trim |
| FLOOR BANDS | 350 mm at every level |
| OPENINGS | round arched, keystone |
| BALUSTRADE | wrought iron |
| FRAMES | dark stained timber |
| BALCONY CURVE | bowed centre bay |
| PROJECTION | 1.95 / 0.90 m |
| BALCONY AREA | 11.2 m² a floor |
| TOP OF BUILDING | +17.05 |

## GENERAL NOTES

1. Preliminary — the exterior only. The plans, site plan and section are agreed at P14 and nothing here changes them: same five levels, same 9.50 × 13.50 m footprint, same 1.00 m setbacks, same openings. Only the skin differs between the two schemes.

2. Every opening drawn here is read from the plan it belongs to rather than redrawn, and checks.py fails the build if an elevation ever shows one the plan does not have.

3. The east and north boundaries are open and carry ordinary windows on every floor. The west is the blind elevation: louvred ventilation only, drawn at high level, and nothing projects.

4. The penthouse stands back 4.81 m from the west and 1.66 m from the north, so on those two faces it is drawn in thin line behind the roof terrace parapet.

5. The balcony appears on the street frontage only and so does not show on any of these three faces.

**FOUR-STOREY VACATION HOME** — PRIVATE CLIENT

DRAWING

**SIDE & REAR ELEVATIONS — SCHEME B “ARCADE”**

| DRAWING No | REVISION | SCALE | DATE |
|---|---|---|---|
| **A-411** | **P15** | **1:75 @ A1** | **2026-10-07** |

Preliminary design issue — not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

- P12 2026-10-07 bedrooms numbered 1-11; all five floors issued as final draft
- P13 2026-10-07 site plan redrawn for the detached villa
- P14 2026-10-07 section A-A recut through the east strip, and marked on every plan
- P15 2026-10-07 exterior: two schemes, elevations and balcony curves