SECOND FLOOR PLAN — DETACHED VILLA

LEVEL +6.60 · 1:50 @ A1 · METRES

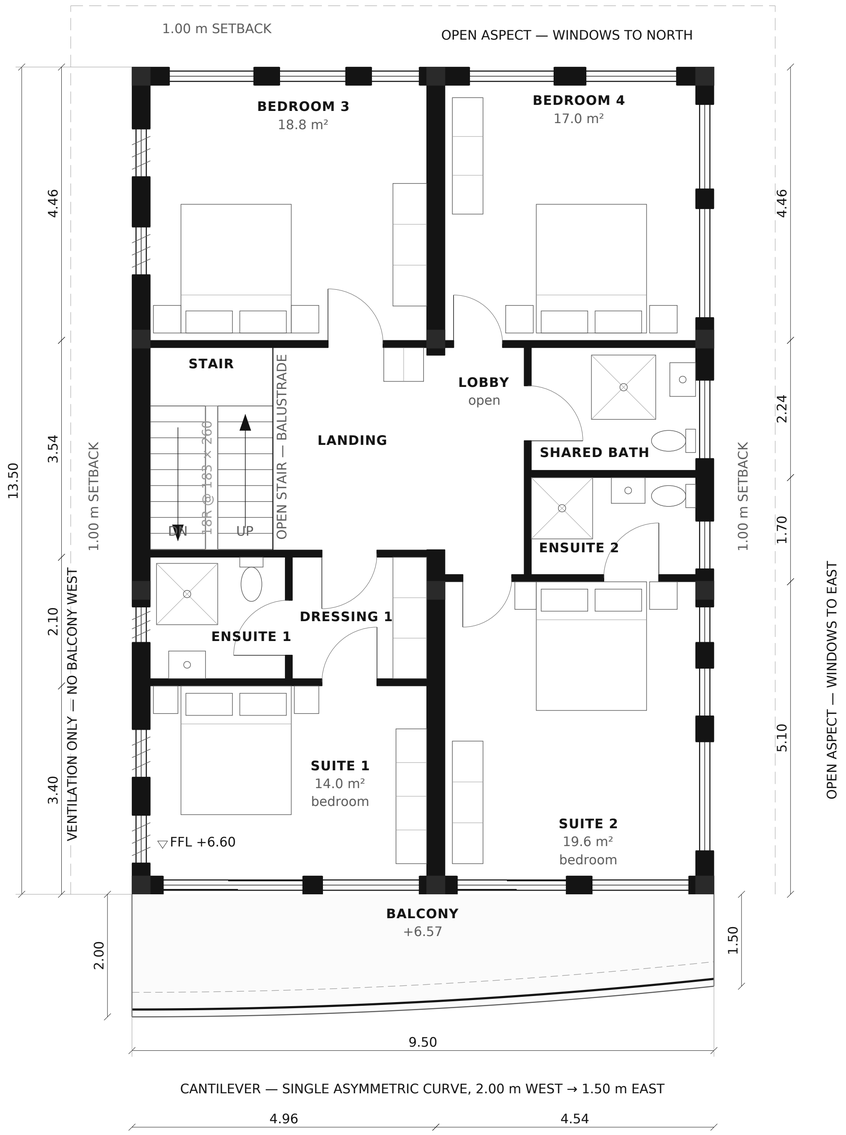

KEY

- Masonry wall cut by section — 200 mm partition, 300 mm external / party
- Internal stud or block partition, 120 mm
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- ▽ +0.00 Finished floor level datum

AREA SCHEDULE

SUITE 1 BEDROOM	14.0 m²
SUITE 1 ENSUITE	4.4 m²
SUITE 1 DRESSING	4.3 m²
SUITE 2 BEDROOM	19.6 m²
SUITE 2 ENSUITE	4.2 m²
LOBBY	4.8 m²
STAIR	6.6 m²
LANDING	7.9 m²
SHARED BATH	5.4 m²
BEDROOM 3	18.8 m²
BEDROOM 4	17.0 m²
TOTAL	**107.0 m²**
GROSS INTERNAL AREA, THIS FLOOR	114.8 m²
BALCONY, EXTERNAL	17.4 m²
BEDROOMS	4 — two of them suites
FLOOR ABOVE / BELOW	+9.90 / +3.30

GENERAL NOTES

1. Final draft — layout agreed. A bedroom floor: two suites and two further bedrooms, on the detached envelope. The ground floor and the site plan are still on the old 11.50 × 14.50 footprint.

2. The east strip is the first floor's, line for line — shared bath 5.4 m², lobby 4.8 m², suite 2's bedroom 19.6 m² as its wall moves 1.30 m north. Every wet room and east window stacks, one drainage stack each, straight to the ground.

3. Suite 1 takes the south-west, ensuite and dressing behind; suite 2 the south-east, its ensuite off the bedroom.

4. The lobby has no door: the spine is opened its whole length between the columns, so lobby and landing read as one space. It serves suite 2, the shared bath and bedroom 4. Bedroom 3 has the old hall — the whole north-west quarter, 18.8 m².

5. The cantilever is carried here too — the same curve, 2.00 m west to 1.50 m east, 17.4 m² — so it now runs all three upper floors and the slabs stack. Both suites open onto it; a screen between the two is worth considering.

FOUR-STOREY VACATION HOME — PRIVATE CLIENT

DRAWING

SECOND FLOOR PLAN — DETACHED VILLA

DRAWING No	REVISION	SCALE	DATE
A-102	**P7**	**1:50 @ A1**	**2026-10-07**

Final draft — layout agreed with the client; not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P4 2026-09-29 north and east opened up, light court removed
P5 2026-10-06 detached villa: 1.00 m setbacks, wave cantilever
P6 2026-10-06 lobby opened, north hall merged into the bedroom
P7 2026-10-06 second floor agreed; ground floor redrawn as the villa