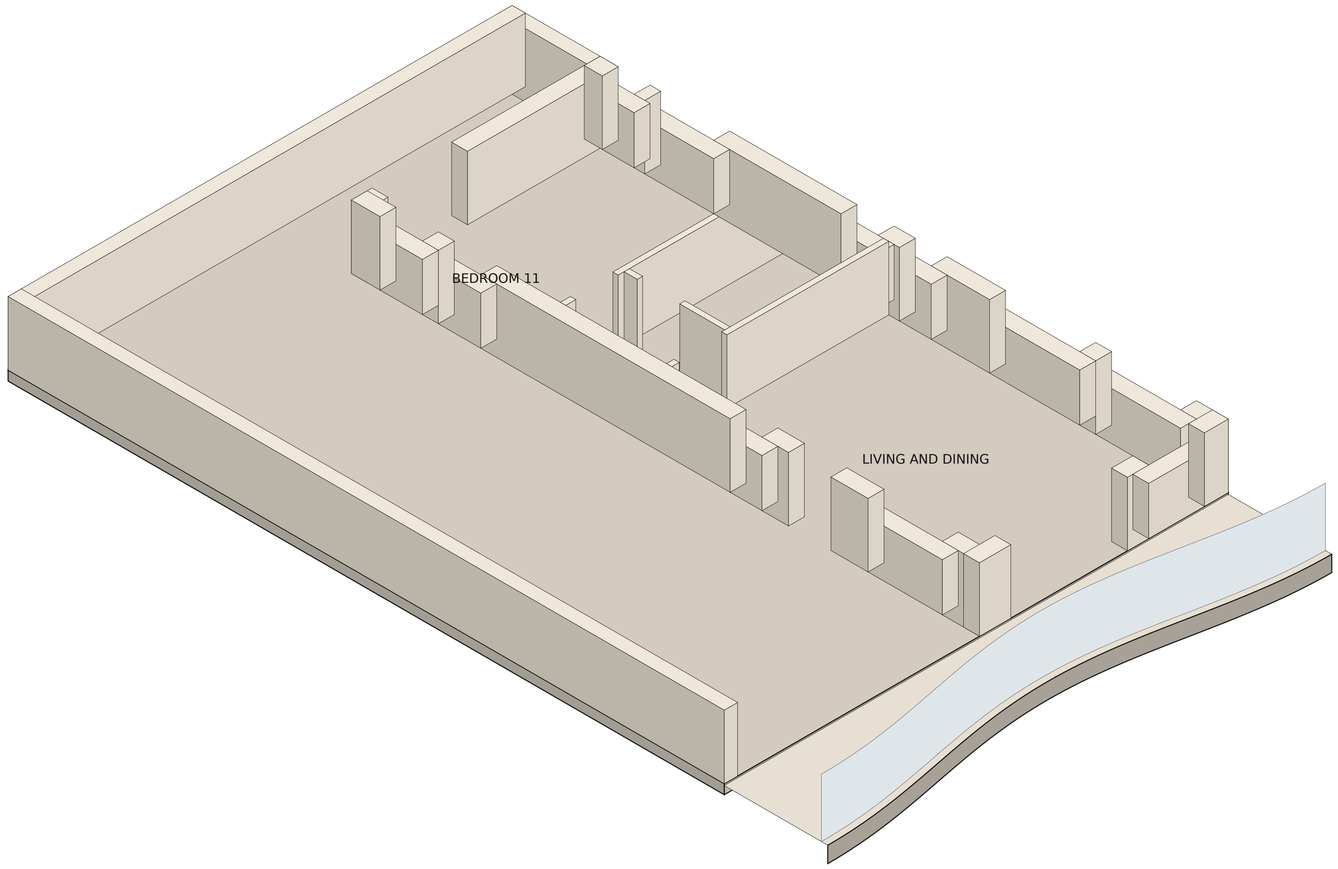

INTERIOR CUTAWAY — PENTHOUSE FLOOR

LEVEL +13.20 · 1:50 @ A1 · METRES

KEY

- External / party wall cut by section, 300 mm — brick, colour unrestricted
- Internal partition, 100 mm — red brick
- Terrace parapet, 250 mm × 1100 mm high
- Single leaf door, swing shown to opening side
- Glazed opening — arched head where noted
- Element above the cut plane (pergola, slab over)
- Void / open to sky
- +0.00 Finished floor level datum

THIS FLOOR

LEVEL	+13.20
ROOMS	4
NET INTERNAL	44.8 m²
WALLS CUT AT	1.20 m above the floor
VIEW	isometric from the south-west
SCHEME	A — Wave
BALCONY	15.7 m²
ROOMS NAMED	2 of 4
DRAWN FROM	A-104

GENERAL NOTES

1. The penthouse floor as a doll's house, its walls cut 1.20 m above the floor and seen from the south-west, which is the corner A-430 uses.

2. Not a render, and not redrawn. The walls come back from the same probe that validates the plans, so this is A-104 in three dimensions and cannot be a different building.

3. A window leaves the wall under it standing to its sill; a door leaves a gap to the floor. Both come from the opening heights scheduled on ARC-500.

4. Faces are painted back to front rather than depth-sorted, so a detail may overlap where two surfaces nearly touch. The plan governs.

5. Rooms of 8 m² and over are named on the floor they stand on. The ensuites, stores and WCs are not: at this scale ten names a floor is a thicket, and A-104 schedules every one of them.

6. For looking at. Nothing is dimensioned here and nothing should be measured off it.

FIVE-STOREY VACATION VILLA — SHAMANDEEL, QUESNA, MENOUFIA, EGYPT

DRAWING

INTERIOR CUTAWAY — PENTHOUSE FLOOR

DRAWING No	REVISION	SCALE	DATE
A-06	**P25**	**1:50 @ A1**	**2026-10-10**

Preliminary design issue — not for construction.
Do not scale; work to figured dimensions only.

REVISIONS

P22 2026-10-08 A-300 to A-302 withdrawn: enlargements of a building not being built
P23 2026-10-10 services layouts: overlapping labels; ground floor re-centred
P24 2026-10-10 EL-400, ME-200 and PL-300 drawn back onto the sheet
P25 2026-10-10 interior cutaways drawn at 1:50, with the principal rooms named